

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



MAILTO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIPTO: 3649 Cane Run Road • Louisville, KY 40211-1961
 (502) 778-2731 • 1 (800) 928-PUMP • **FAX** (502) 774-3624

Visit our web site:
zoellerengprod.com

SECTION: Z4.10.325

ZM2635

0318

Supersedes

0217


REPLACEMENT PARTS LIST FOR GRINDER MODELS:

E7012 230V 1 PHASE
I7012 200V 1 PHASE
F7012 230V 3 PHASE
G7012 460V 3 PHASE
J7012 200V 3 PHASE
BA7012 575V 3 PHASE

TO ORDER REPLACEMENT PARTS:

PLEASE FURNISH THE
FOLLOWING INFORMATION:


- Model Number.
- Part Number of Pump.
- Part Number and Description of part.

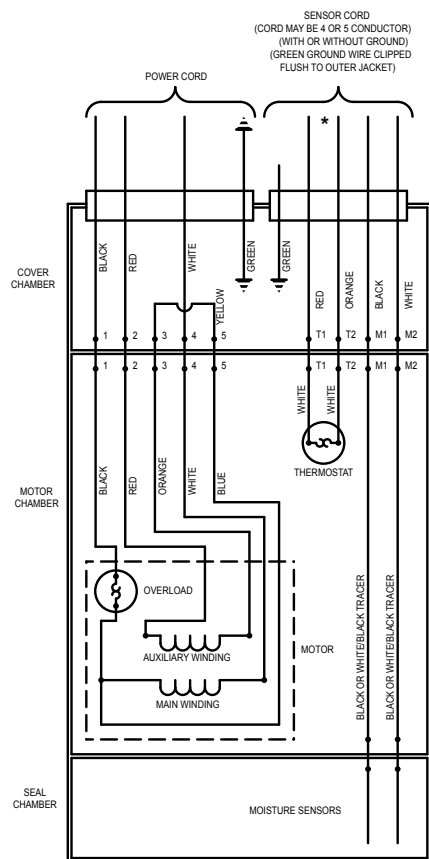

*Thermostat Optional

WIRING DIAGRAM FOR MODELS
 "E7012" All Revisions
 "I7012" All Revisions
 "J7012" All Revisions
 03/11 thru Current

016129

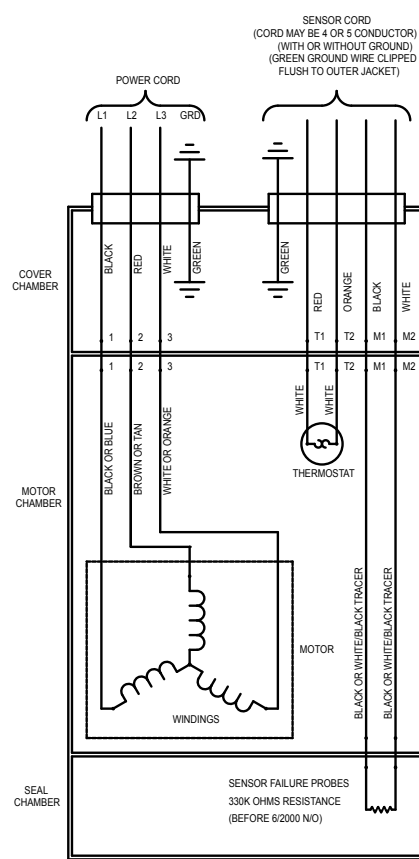

WIRING DIAGRAM FOR MODELS
 "F7012" All Revisions
 "G7012" All Revisions
 "J7012" All Revisions
 "BA7012" All Revisions
 03/11 thru Current

008752

REPLACEMENT PARTS LIST FOR MODELS “E7012” and “I7012”.

See back page for illustration.

REF. NO.	DESCRIPTION	QTY.	NOTES	MODELS:		I7012-A	I7012-B
				E7012-A	E7012-B		
				03/11 thru 1/17	2/17 thru Current	03/11 thru 1/17	2/17 thru Current
1	Cover & Cord 200/230V/1PH	1	2	151482	151482	151482	151482
2	• Seal, SQ-Ring Cover	1		014592	014592	014592	014592
3	• Seal, Thru Wall Term.	9		003402	003402	003402	003402
4	Housing, Mtr. & Str. 1Ph	1	1	010266	010266	010267	010267
5	• Oil, Dielectric (57 OZ Can)	1		009051	009051	009051	009051
6	Rotor Asm. 1Ph	1		010269	010269	010269	010269
7	Ring, Snap-5100-100 Truarc	1		007769	007769	007769	007769
8	Key	1		011711	011711	011711	011711
9	Cordage Term. & Seal/20'/18-2 SOW-A/MS	1	2	009053	009053	009053	009053
10	• Seal, Cord-Asm./MS	1	2	011064	011064	011064	011064
11	Cordage Term. & Seal/20'/Power	1	2	155429	155429	155429	155429
12	• Seal, Cord-Asm. & Strain Relief	1	2	015634	015634	015634	015634
13	Case & Seal	1		015830	015830	015830	015830
14	• Plug, Test-Brass	3		015023	015023	015023	015023
15	• Bearing, Radial .4724 ID	1		006703	006703	006703	006703
16	• Bearing, Angular Contact	1		007765	007765	007765	007765
17	• Seal, SQ-Ring Adapter	1		014257	014257	014257	014257
18	• Sensor, Moisture Asm.	1		007770	007770	007770	007770
19	Adapter Asm. Grinder	1		009055	009055	009055	009055
20	• Oil, Dielectric (11 OZ Can)	1		009056	009056	009056	009056
21	• Seal Asm., Shaft Upper	1		007763	007763	007763	007763
21	• Seal Asm., Shaft Lower	1		151365	151365	151365	151365
22	• Seal, SQ-Ring Seal Plate	1		014591	014591	014591	014591
23	Plate, Seal-Mach.	1		007757	007757	007757	007757
24	Impeller-Mach.	1		018239	018239	018239	018239
25	Housing, Pump-Mach.	1		015800	154090	015800	154090
26	Cutter & Disc Asm.	1		019075	154536	019075	154536
27	Shim Set	1		012632	012632	012632	012632
28	Guard, Cutter-Plastic	1		008528	N/A	008528	N/A
29	Handle	1		016801	016801	016801	016801
30	Wire Asm.-P-P (1) Wire	1		016134	016134	016134	016134
31	Resistor	1		013740	013740	013740	013740
32	• Screw, #6-32 x .25RHM SL TC STLGR	1		001877	001877	001877	001877
33	• Screw, .313-18 x 1 HH CAP SS	2		002608	002608	002608	002608
34	• Screw, .313-18 x 1.25 HH Cap-SS	12		001908	001908	001908	001908
35	• Screw, #10-24 x .625" SH Cap SS	4		007774	007774	007774	007774
36	• Screw, .25-20 x 1 LG HH SS (Nylock Pre-Coat 80)	1		018602	018602	018602	018602
37	• Screw, .25-20 x .75 SH CAP SS	3		007768	N/A	007768	N/A
	• Screw, .25-20 x .75 SH CAP SS	6		N/A	007768	N/A	007768
38	• Screw, #10-24 x .875 FLT SH CAP SS	3		007761	N/A	007761	N/A
39	• Washer, Lock .312 ID	14		006402	006402	006402	006402
40	• Washer-Retaining	1		008533	008533	008533	008533
41	• Washer-Flat SS	2		008773	008773	008773	008773
42	• Washer-Flat SS .25 Standard	3		004480	N/A	004480	N/A
43	Disc, Cutter	1		018241	153203	018241	153203
44	Cutter/Shim Asm/5 Blade/1" Screw	1		019698	154537	019698	154537
▣	Rebuild Kit	1		151481	151481	151481	151481

- Items included in Rebuild Kit.
- ▣ Not Shown in Illustration.

NOTE:

- 1) Housing Mtr & Stator (Item 4) is preassembled at the factory and must be replaced as a unit. Stator is permanently attached to the Motor Housing. Plug (Item 14); Seal, Thru WallTerm. (Item 3) are replaceable.
- 2) If an “X” follows Model No., or Date Mfg. On ID tag, consult factory for ordering of this part.
- 3) See FM0160 Parts Price Sheet for listing of parts prices.
- 4) “NA” indicates not applicable.

REPLACEMENT PARTS LIST FOR MODELS "J7012", "F7012", "G7012", "BA7012".

See back page for illustration.


REF. NO.	DESCRIPTION	QTY.	NOTES	MODELS:		J7012-A	J7012-B	F7012-A	F7012-B	G7012-A	G7012-B	BA7012-A	BA7012-B
						03/11 thru 1/17	2/17 thru Current	03/11 thru 1/17	2/17 thru Current	03/11 thru 1/17	2/17 thru Current	03/11 thru 1/17	2/17 thru Current
1	Cover & Cord 200/230/460/575V/3PH	1	2			151479	151479	151479	151479	151479	151479	151479	151479
2	• Seal, SQ-Ring Cover	1				014592	014592	014592	014592	014592	014592	014592	014592
3	• Seal, Thru Wall Term.	9				003402	003402	003402	003402	003402	003402	003402	003402
4	Housing, Mtr. & Str. 3Ph	1	1			010265	010265	010263	010263	010264	010264	010670	010670
5	• Oil, Dielectric (67 OZ Can)	1				009064	009064	009064	009064	009064	009064	009064	009064
6	Rotor Asm. 3Ph	1				010268	010268	010268	010268	010268	010268	010268	010268
7	Ring, Snap-5100-100 Truarc	1				007769	007769	007769	007769	007769	007769	007769	007769
8	Key	1				011711	011711	011711	011711	011711	011711	011711	011711
9	Cordage Term. & Seal/20'/18-5 SOW-A/M&T	1	2			012928	012928	012928	012928	012928	012928	012928	012928
10	• Seal, Cord-Asm./MS & THRML	1	2			012953	012953	012953	012953	012953	012953	012953	012953
11	Cordage Term. & Seal/20'/Power	1	2			155430	155430	155430	155430	155430	155430	155430	155430
12	• Seal, Cord-Asm. & Strain Relief	1	2			015634	015634	015634	015634	015634	015634	015634	015634
13	Case & Seal	1				015830	015830	015830	015830	015830	015830	015830	015830
14	• Plug, Test-Brass	3				015023	015023	015023	015023	015023	015023	015023	015023
15	• Bearing, Radial .4724 ID	1				006703	006703	006703	006703	006703	006703	006703	006703
16	• Bearing, Angular Contact	1				007765	007765	007765	007765	007765	007765	007765	007765
17	• Seal, SQ-Ring Adapter	1				014257	014257	014257	014257	014257	014257	014257	014257
18	• Sensor, Moisture Asm.	1				007770	007770	007770	007770	007770	007770	007770	007770
19	Adapter Asm. Grinder	1				009055	009055	009055	009055	009055	009055	009055	009055
20	• Oil, Dielectric (11 OZ Can)	1				009056	009056	009056	009056	009056	009056	009056	009056
21	• Seal Asm., Shaft Upper	1				007763	007763	007763	007763	007763	007763	007763	007763
21	• Seal Asm., Shaft Lower	1				151365	151365	151365	151365	151365	151365	151365	151365
22	• Seal, SQ-Ring Seal Plate	1				014591	014591	014591	014591	014591	014591	014591	014591
23	Plate, Seal-Mach.	1				007757	007757	007757	007757	007757	007757	007757	007757
24	Impeller-Mach.	1				018239	018239	018239	018239	018239	018239	018239	018239
25	Housing, Pump-Mach.	1				015800	154090	015800	154090	015800	154090	015800	154090
26	Cutter & Disc Asm.	1				019075	154536	019075	154536	019075	154536	019075	154536
27	Shim Set	1				012632	012632	012632	012632	012632	012632	012632	012632
28	Guard, Cutter-Plastic	1				008528	N/A	008528	N/A	008528	N/A	008528	N/A
29	Handle	1				016801	016801	016801	016801	016801	016801	016801	016801
30	Wire Asm.-P-P (1) Wire	1				016134	016134	016134	016134	016134	016134	016134	016134
31	Resistor	1				013740	013740	013740	013740	013740	013740	013740	013740
32	• Screw, #6-32 x .25RHM SL TC STLGR	1				001877	001877	001877	001877	001877	001877	001877	001877
33	• Screw, .313-18 x 1 HH CAP SS	2				002608	002608	002608	002608	002608	002608	002608	002608
34	• Screw, .313-18 x 1.25 HH Cap-SS	12				001908	001908	001908	001908	001908	001908	001908	001908
35	• Screw, #10-24 x .625" SH Cap SS	4				007774	007774	007774	007774	007774	007774	007774	007774
36	• Screw, .25-20 x 1 LG HH SS (Nylock Pre-Coat 80)	1				018602	018602	018602	018602	018602	018602	018602	018602
37	• Screw, .25-20 x .75 SH CAP SS	3				007768	N/A	007768	N/A	007768	N/A	007768	N/A
	• Screw, .25-20 x .75 SH CAP SS	6				N/A	007768	N/A	007768	N/A	007768	N/A	007768
38	• Screw, #10-24 x .875 FLT SH CAP SS	3				007761	N/A	007761	N/A	007761	N/A	007761	N/A
39	• Washer, Lock .312 ID	14				006402	006402	006402	006402	006402	006402	006402	006402
40	• Washer-Retaining	1				008533	008533	008533	008533	008533	008533	008533	008533
41	• Washer Flat SS	2				008773	008773	008773	008773	008773	008773	008773	008773
42	• Washer-Flat SS .25 Standard	3				004480	N/A	004480	N/A	004480	N/A	004480	N/A
43	Disc, Cutter	1				018241	153203	018241	153203	018241	153203	018241	153203
44	Cutter/Shim Asm/5 Blade/1" Screw	1				019698	154537	019698	154537	019698	154537	019698	154537
□	Rebuild Kit	1				151480	151480	151480	151480	151480	151480	151480	151480

- Items included in Rebuild Kit.
- Not Shown in Illustration.

NOTE:

- 1) Housing Mtr & Stator (Item 4) is preassembled at the factory and must be replaced as a unit. Stator is permanently attached to the Motor Housing. Plug (Item 14); Seal, Thru Wall Term. (Item 3) are replaceable.
- 2) If an "X" follows Model No., or Date Mfg. On ID tag, consult factory for ordering of this part.
- 3) See FM0160 Parts Price Sheet for listing of parts prices.
- 4) "NA" indicates not applicable.

REPLACEMENT PARTS ILLUSTRATION FOR 7012 - ALL MODELS

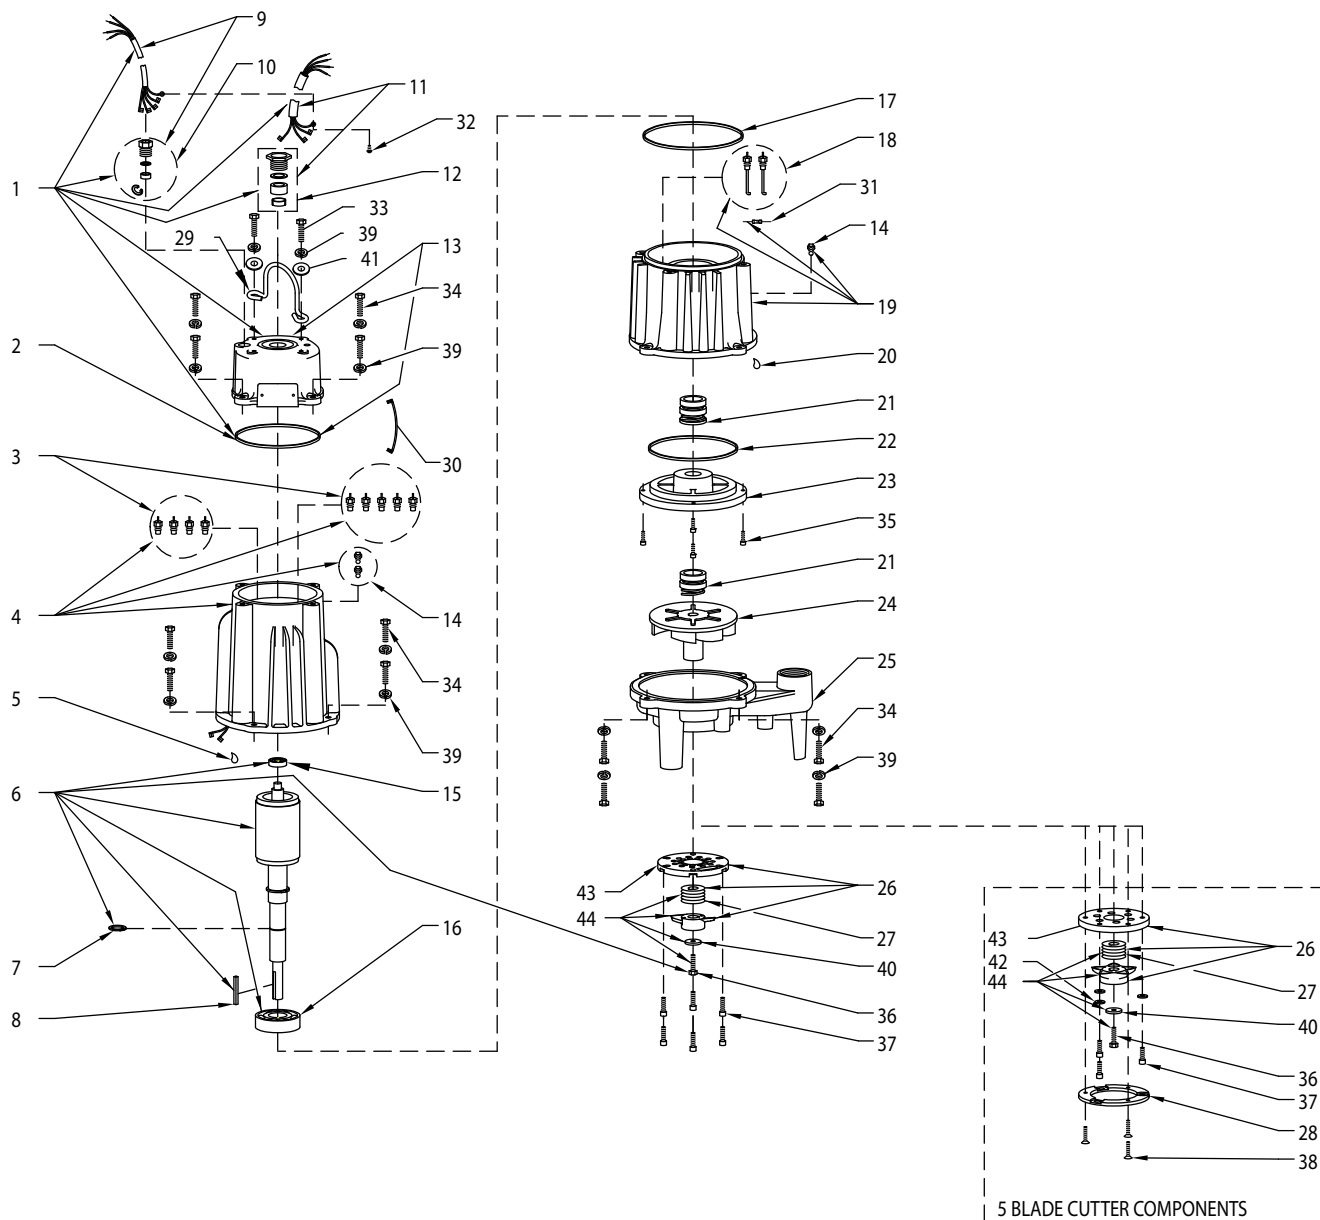

SK2658



MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

Trusted. Tested. Tough.™

visit our web site:
zoellerengprod.com