

Trusted. Tested. Tough.®

SECTION: Z3.20.120

ZM3385

1021

Supersedes

New

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

Visit our website:
 zoellerengineered.com

X6290 HAZARDOUS LOCATION SERIES

Class I, Division 1, Groups C & D Rated and Class I, Zone 1, Groups IIA & IIB Gas Areas

or

Class II, Division 1, Groups E, F & G and Zone 20 Dust Areas



Certified to CSA Standard
 C22.2 No. 145

Tested to FM Standard
 3600 & 3615 & 3616

TECHNICAL DATA Commercial Duty Sewage


MODEL NUMBER:	<input type="checkbox"/> X6292	<input type="checkbox"/> X6293	<input type="checkbox"/> X6294	<input type="checkbox"/> X6295
PUMP NAME PLATE HORSEPOWER: HP	1/2	1	1-1/2	2
MOTOR RPM:	3450	3450	3450	3450
IMPELLER:	CAST IRON VORTEX			
	OPTIONAL <input type="checkbox"/> BRONZE VORTEX			
DISCHARGE SIZE:	<input type="checkbox"/> 2" NPT VERTICAL DISCHARGE <input type="checkbox"/> 3" NPT VERTICAL DISCHARGE			

PUMP NET WEIGHT: lbs. (kg)	129 lbs. (58.5kg)	SERVICE FACTOR:	1.0
SOLID SIZE: in (mm)	2" (50 mm)	TANDEM SEALS:	STANDARD
MOTOR DESIGN LETTER:	NEMA B	SQUARE RING SEALS:	VITON
CORD LENGTH: ft (m)	25' (7.6 m) <input type="checkbox"/> _____'	MOTOR SHAFT:	416 SS
SENSOR CORD LENGTH:	INCLUDED W/POWER CORD	STATOR AND LEAD WIRES INSULATION:	X6292-X6293 CLASS B
MOTOR TYPE CSA APPROVED:	Class I, Division 1, Groups C & D Class I, Zone 1, Groups IIA & IIB		X6294-X6295 CLASS F
	SUBMERSIBLE	MAXIMUM STATOR TEMPERATURE:	CLASS B 266 °F (130 °C)
SURFACE TEMPERATURE CODE:	T5 (1PH) T6 (3PH)		

SHAFT SEAL CONSTRUCTION:	STANDARD	UPPER - CARBON/CERAMIC, LOWER - SILICON CARBIDE/CARBON
	OPTIONAL UPPER	<input type="checkbox"/> CARBON/SILICON CARBIDE <input type="checkbox"/> SILICON CARBIDE/SILICON CARBIDE
	OPTIONAL LOWER	<input type="checkbox"/> SILICON CARBIDE/SILICON CARBIDE
STANDARD SENSING DEVICES *	MOTOR THERMAL SHUTOFF	INTEGRAL OVERLOAD WITH AUTOMATIC RESET - 1 PHASE
		THERMAL SENSOR WITH LEAD WIRES - 3 PHASE
	MOISTURE DETECTION	MOISTURE SENSING PROBES WITH LEAD WIRES
MINIMUM FLUID LEVEL FOR CONTINUOUS OPERATIONS: in (m)	24" (0.6 m)	
MAXIMUM WATER TEMPERATURE:	104 °F (40 °C)	

*Requires a circuit in control panel to function.

MODEL	HP	<input type="checkbox"/> 115V/1PHASE	<input type="checkbox"/> 200V/1PHASE	<input type="checkbox"/> 230V/1PHASE	<input type="checkbox"/> 200V/3PHASE	<input type="checkbox"/> 230V/3PHASE	<input type="checkbox"/> 460V/3PHASE	<input type="checkbox"/> 575V/3PHASE
		FLA	FLA	FLA	FLA	FLA	FLA	FLA
X6292	1/2	15.0	8.8	7.5	6.4	5.2	2.9	2.4
X6293	1	N/A	12.0	10.2	8.2	7.6	4.0	3.3
X6294	1-1/2	N/A	17.8	13.7	10.8	9.5	4.8	3.8
X6295	2	N/A	20.5	17.1	14.3	12.2	6.1	4.9

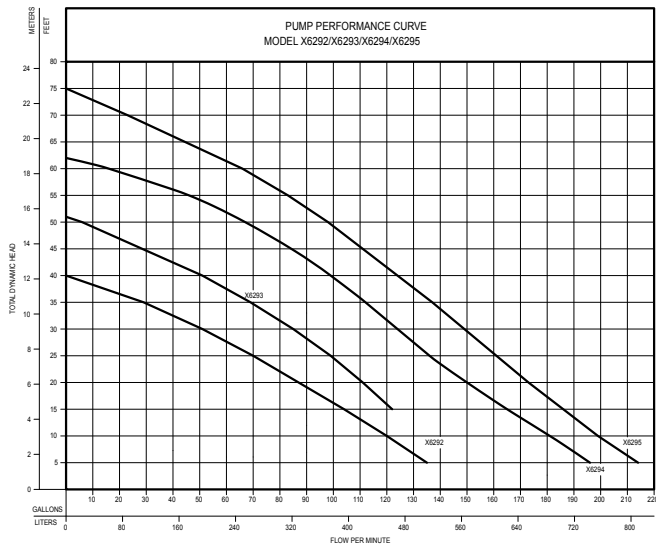

MODEL		X6292		X6293		X6294		X6295	
Feet	Meters	Gal.	Liters	Gal.	Liters	Gal.	Liters	Gal.	Liters
5	1.5	135	511	--	--	196	742	214	810
10	3.0	120	454	--	--	181	685	199	753
15	4.6	104	394	122	462	165	625	186	704
20	6.1	87	329	111	420	150	568	173	655
25	7.6	70	265	99	375	136	515	161	609
30	9.1	51	193	85	322	124	469	149	564
35	10.7	29	110	69	261	112	424	137	519
40	12.2	--	--	51	193	99	375	124	469
50	15.2	--	--	6	23	67	254	98	371
55	16.8	--	--	--	--	46	174	83	314
60	18.3	--	--	--	--	16	61	66	250
70	21.3	--	--	--	--	--	--	23	87
Shut-off Head:		40 ft.(12.2m)		51 ft.(15.5m)		62 ft.(18.9m)		75 ft.(22.9m)	


009919

Standard all models - 25 ft. (7.6 m) cord - 1/2 HP				
X6292 MODELS	Control Selection			Listings
	Volts	PH	Amps	c CSA us
NX6292	115	1	15.0	No ⁽¹⁾
EX6292	230	1	7.5	Yes
IX6292	200	1	8.8	Yes
JX6292	200	3	6.4	Yes
FX6292	230	3	5.2	Yes
GX6292	460	3	2.9	Yes
BAX6292	575	3	2.4	No

Standard all models - 25 ft. (7.6 m) cord - 1 HP				
X6293 MODELS	Control Selection			Listings
	Volts	PH	Amps	c CSA us
EX6293	230	1	10.2	Yes
IX6293	200	1	12.0	Yes
JX6293	200	3	8.2	Yes
FX6293	230	3	7.6	Yes
GX6293	460	3	4.0	Yes
BAX6293	575	3	3.3	Yes

Standard all models - 25 ft. (7.6 m) cord - 1-1/2 HP				
X6294 MODELS	Control Selection			Listings
	Volts	PH	Amps	c CSA us
*EX6294	230	1	13.7	Yes
IX6294	200	1	17.8	Yes
JX6294	200	3	10.8	Yes
FX6294	230	3	9.5	Yes
GX6294	460	3	4.8	Yes
BAX6294	575	3	3.8	Yes

Standard all models - 25 ft. (7.6 m) cord - 2 HP				
X6295 MODELS	Control Selection			Listings
	Volts	PH	Amps	c CSA us
*EX6295	230	1	17.1	No ⁽¹⁾
IX6295	200	1	20.5	Yes
JX6295	200	3	14.3	Yes
FX6295	230	3	12.2	Yes
GX6295	460	3	6.1	Yes
BAX6295	575	3	4.9	Yes

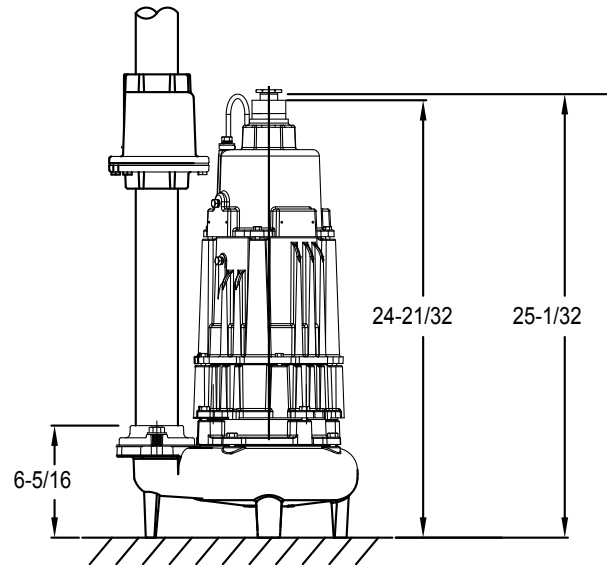

SK1990

FEATURES

- Durable epoxy coated cast iron construction.
- Motor - 1/2 hp or 1 hp, 60 hz, 1750 rpm, 1 ph or 3 ph, oil filled, hermetically sealed
- Thermal sensor with lead wire (3PH), integral overload with automatic reset (1 PH)
- Bearings - upper and lower ball bearings
- Stainless steel motor shaft.
- Dual mechanical shaft seals - upper carbon/ceramic, lower silicon carbide/carbon. Optional seal materials available
- Viton o-ring seals and cover gasket
- Impeller - non-clogging cast iron vortex design passes 2" spherical solids.
- 25 Foot ul listed 3 wire neoprene cord and plug. Longer cords available in lengths of 35-50 feet.
- No screens to clog.
- Stainless steel screws, bolts and handle.
- 2" Npt discharge with 3" lange available.
- Corrosion resistant powder coated epoxy inish.
- Moisture sensors available for early warning of seal failure.
- 100% Computerized tested.

CAUTION

All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electric Code (NEC) and the Occupational Safety and Health Act (OSHA).