
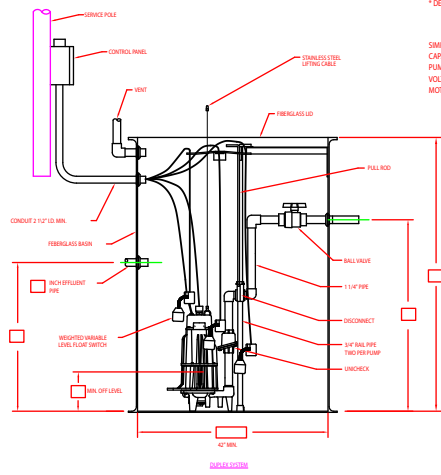


PUMP STATION DESIGN DATA

AVG. DAILY SEWAGE FLOW: _____ PEOPLE @ _____ G.C.D. = _____ G.P.D.
 AVG. FLOW: _____ 1,440 _____ G.P.M.
 PEAK PUMPING RATE PER PUMP: X _____ G.P.M. = _____ G.P.M.
 STORAGE CAPACITY: _____ MIN. X _____ G.P.M. = _____ GAL.
 HRS. EMERGENCY STORAGE: MIN. X _____ G.P.M. = _____ GAL.
 STATIC HEAD _____ FT.
 FORCE MAIN SIZE: 1 1/4" _____ 1 1/2" _____ 2" _____
 MATERIAL: _____ C FACTOR: _____
 DYNAMIC HEADLOSS @ _____ G.P.M. (PUMPING RATE) _____ FT.
 SEWER PRESSURE _____ PSIG X 2.31 _____ FT.
 TOTAL DYNAMIC HEAD (TDH) _____ FT.
 * DESIGN PER LOCAL CODE.

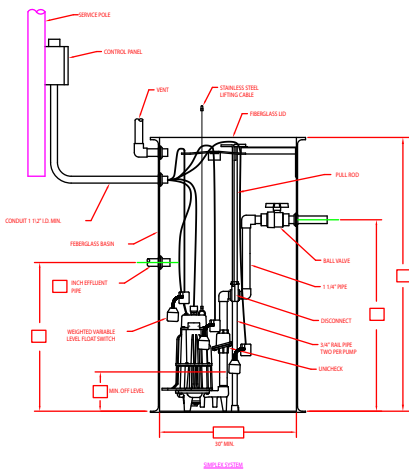

PUMP STATION DATA

SIMPLEX _____ DUPLEX _____
 CAPACITY (OPERATING POINT): _____ G.P.M. @ _____ T.D.H.
 PUMP MODEL: _____
 VOLTS _____ PHASE _____
 MOTOR CONTROL: _____

SK1594

THE INFORMATION ON THESE DRAWINGS OR WEB PAGES IS MADE AVAILABLE FOR YOUR USE. HOWEVER, YOU USE THE INFORMATION AT YOUR OWN RISK. WE BELIEVE THE INFORMATION TO BE CORRECT AND ACCURATE AT THE TIME OF ISSUE. ZOELLER COMPANY ASSUMES NO LIABILITY, EXPRESSED OR IMPLIED, RESULTING FROM YOUR ACCESSING AND USING THIS INFORMATION. DUE TO CHANGES AND/OR DOWNLOAD PROBLEMS, IT IS YOUR RESPONSIBILITY AND YOU AGREE TO BE SOLELY RESPONSIBLE TO VERIFY THAT THE INFORMATION IS CORRECT AND ACCURATE FOR YOUR PURPOSES.