

Heavy Duty Series



72 HD,
3" discharge



72 HD,
4" discharge

72 HD, 10 & 15 HP
Horizontal Flanged Discharge 3450 RPM

ZOELLER 
ENGINEERED PRODUCTS


TRUSTED. TESTED. TOUGH.®

zoellerengineered.com

72 HD, 10 & 15 HP Horizontal Flanged Discharge 3450 RPM

FEATURES*

- 200, 230, 460 & 575 Volt 3 phase
- 3" or 4" ANSI flange horizontal discharge
- Cutting plate decreases solids to less than 1/4"
- Vortex impeller
- 3450 RPM
- Durable, epoxy coated cast iron construction
- Oil filled motor
- Dual mechanical shaft seal: Upper - Carbon Ceramic, Lower - Silicon Carbide/Silicon Carbide
- Buna-N elastomers
- Thermal sensor and moisture detection
- 304 Stainless steel hardware
- 100% computerized water tested

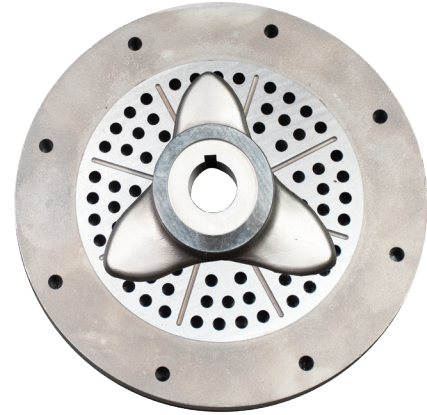

OPTIONS*

- Seal upgrades
- Additional cord lengths
- Viton elastomers
- Trimmed impeller
- Certified performance audits

APPLICATIONS:

- Sewage lift stations
- Housing developments
- Pressure sewers
- Pumping stations

*consult tech data sheet for specific technical information

Tech Data Sheets	
72 HD	ZM3316