


PLANO REF. MARCO PUERTA
INSTALACIÓN SIMPLEX

PLANO REF. MARCO PUERTA
INSTALACIÓN DÚPLEX

DIMENSIONES BASADAS EN TAMAÑOS ESTÁNDAR DE CONECTORES ANSI PARA VÁLVULAS DE RETENCIÓN NECESARIOS, NO SE MUESTRAN POR CLARIDAD

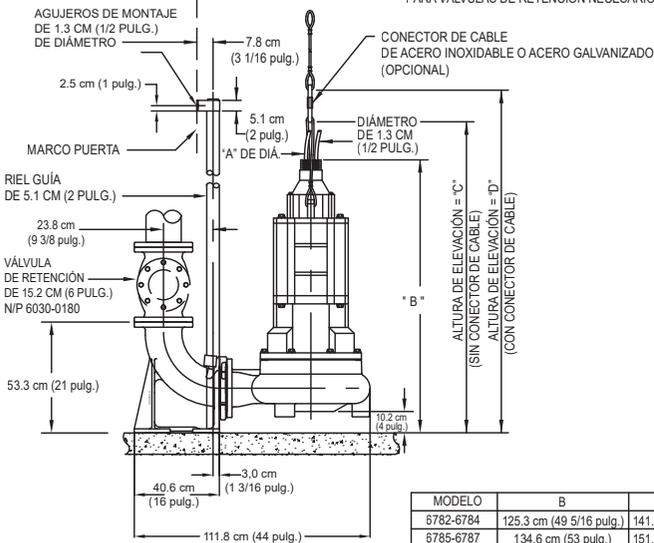

MODELO	B	C	D
6782-6784	125.3 cm (49 5/16 pulg.)	141.6 cm (55 3/4 pulg.)	153.0 cm (60 1/4 pulg.)
6785-6787	134.6 cm (53 pulg.)	151.1 cm (59 1/2 pulg.)	169.5 cm (66 3/4 pulg.)

MODELO	6782	6783	6784	6785	6786	6787
KW	18.64	22.37	29.83	37.28	44.74	55.93
DIM.	"A"	"A"	"A"	"A"	"A"	"A"
230 V	3.43 (1.35)	3.94 (1.55)	3.94 (1.55)	-	-	-
460 V	2.50 (0.985)	2.50 (0.985)	2.86 (1.125)	3.43 (1.35)	3.94 (1.55)	3.94 (1.55)
575 V	2.50 (0.985)	2.50 (0.985)	2.50 (0.985)	2.86 (1.125)	3.43 (1.35)	3.43 (1.35)