

Trusted. Tested. Tough.®

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



Z1.10.300

ZM1372

0423

Supersedes

0422

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
Tel: (502) 778-2731 • 1 (800) 928-PUMP

Visit our website:
zoellerengineered.com



6160 SERIES COMMERCIAL EFFLUENT PUMPS TECHNICAL DATA



	☐ 6161	☐ 6163	☐ 6165
PUMP NAME PLATE HORSEPOWER:	1/2 HP	1/2 HP	1 HP
SOLID SIZE: in (mm)	3/4" (19mm)	3/4" (19mm)	3/4" (19mm)
MINIMUM HEAD: ft. (m)	5.0' (1.5m)	5.0' (1.5m)	5.0' (1.5m)
MAXIMUM HEAD: ft. (m)	56' (17.1m)	66' (20.1m)	86.5' (26.4m)
MAX.FLOW GPM (L/min) @ MIN. HEAD ft. (m)	100 GPM @ 5' (379 L/min @ 1.5m)	61 GPM @ 5' (231 L/min @ 1.5m)	61 GPM @ 5' (231 L/min @ 1.5m)
DISCHARGE SIZE: VERTICAL FEMALE	☐ 1-1/2" NPT ☐ 2" NPT ☐ 3" NPT	☐ 1-1/2" NPT ☐ 2" NPT ☐ 3" NPT	☐ 1-1/2" NPT ☐ 2" NPT ☐ 3" NPT

PUMP NET WEIGHT: lbs (kg)	87 lbs (39 kg)	MOTOR TYPE:	SUBMERSIBLE
SERVICE FACTOR:	1.0	TYPE SOW POWER CORD LENGTH: ft (m)	25' (7.62m) ☐ 50' (15.24m)
MOTOR DESIGN LETTER:	NEMA B	MOTOR SHAFT:	416 S.S.
IMPELLER TYPE:	CAST IRON VORTEX	STATOR INSULATION:	CLASS B
SQUARE RINGS:	VITON	LEAD WIRES INSULATION:	CLASS B
RPM:	3450	MAXIMUM STATOR TEMPERATURE:	266°F (130°C)

SHAFT SEAL CONSTRUCTION:	STANDARD		UPPER-CARBON / CERAMIC, LOWER-SILICON CARBIDE / CARBON
	OPTIONAL	☐ UPPER	☐ SILICON CARBIDE / SILICON CARBIDE
		☐ LOWER	☐ SILICON CARBIDE / SILICON CARBIDE
MOTOR THERMAL SHUTOFF:	Standard (Single Phase Only)		THERMAL OVERLOAD SWITCH WITH AUTOMATIC RESET
MOISTURE DETECTION:	☐ OPTIONAL*		MOISTURE SENSING PROBES
MINIMUM FLUID LEVEL FOR CONTINUOUS OPERATIONS: in. (m)			24" (0.6 m)
MAXIMUM WATER TEMPERATURE:			☐ 130 °F (54 °C)


*Requires a circuit in control panel to function.

ELECTRICAL DATA


MODEL	HP	☐ 115V/1Ph		☐ 200V/1Ph		☐ 230V/1Ph		☐ 200V/3Ph		☐ 230V/3Ph		☐ 460V/3Ph		☐ 575V/3Ph	
		FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA
☐ 6161	1/2	15.5	31.2	8.8	16.7	7.5	15.6	6.4	23.0	5.2	12.5	2.9	12.4	2.4	11.3
☐ 6163	1/2	15.0	31.2	8.5	16.7	7.5	15.6	6.0	23.0	4.8	12.5	2.9	12.4	2.4	11.3
☐ 6165	1	--	--	12.6	26.9	10.2	19.0	7.5	30.0	7.4	14.0	3.7	14.0	3.0	14.4

Refer to reverse side for Head/Capacity Performance Curves

© Copyright 2023 Zoeller® Co. All rights reserved.

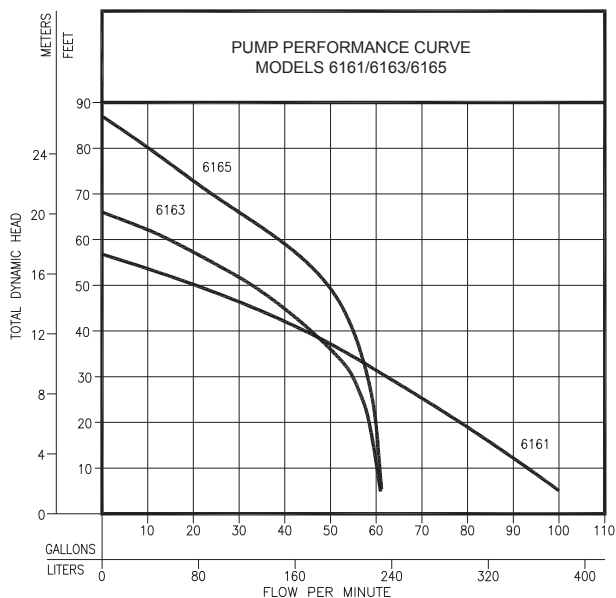

MODELS		6161		6163		6165	
Feet	Meters	Gal.	Liters	Gal.	Liters	Gal.	Liters
5	1.5	100	379	61	231	61	231
10	3.0	93	352	60	227	60.5	229
15	4.6	86	326	60	227	60.3	228
20	6.1	79	299	59	223	60	227
25	7.6	71	267	57	216	59	223
30	9.1	62	235	55	208	58	220
40	12.2	45	170	46	174	55	208
50	15.2	20	76	33	125	50	189
60	18.3	--	--	15	57	39	148
70	21.3	--	--	--	--	22.5	85
80	24.4	--	--	--	--	10	38
Shut-off Head:		56 ft. (17.1m)		66 ft. (20.1m)		86.5 ft. (26.4m)	

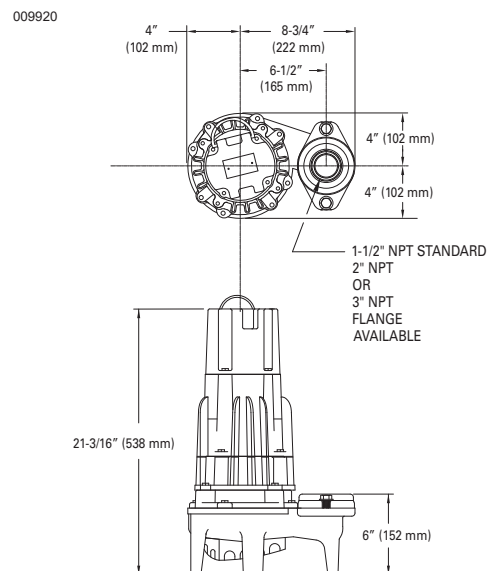

SK1413

Standard all models - 25 ft. cord - 1/2 H.P.				
6161 MODELS	Control Selection			Listings
	Volts	Ph	Amps	cCSAus
*N6161	115	1	15.5	Yes
*E6161	230	1	7.5	Yes
I6161	200	1	8.8	Yes
J6161	200	3	6.4	Yes
F6161	230	3	5.2	Yes
G6161	460	3	2.9	Yes
BA6161	575	3	2.4	Yes

Standard all models - 25 ft. cord - 1/2 H.P.				
6163 MODELS	Control Selection			Listings
	Volts	Ph	Amps	cCSAus
*N6163	115	1	15.5	Yes
*E6163	230	1	7.5	Yes
I6163	200	1	8.8	Yes
J6163	200	3	6.0	Yes
F6163	230	3	4.8	Yes
G6163	460	3	2.9	Yes
BA6163	575	3	2.4	Yes

Standard all models - 25 ft. cord - 1 H.P.				
6165 MODELS	Control Selection			Listings
	Volts	Ph	Amps	cCSAus
*E6165	230	1	10.2	Yes
I6165	200	1	12.6	Yes
J6165	200	3	7.5	Yes
F6165	230	3	7.4	Yes
G6165	460	3	3.7	Yes
BA6165	575	3	3.0	Yes

* Molded Plug
Pumps are available with optional moisture sensors. Seal Fail indicator light available in NEMA 4X control panels.

FEATURES

- Durable epoxy coated cast iron construction
- Motor - 1/2 HP or 1 HP, 60 Hz, 3450 RPM, 1 PH or 3 PH, oil filled, hermetically sealed, automatic reset, thermal overload protected (1 PH)
- Bearings - upper and lower ball bearings
- Stainless steel motor shaft
- Dual mechanical shaft seals - upper carbon/ceramic, lower silicon carbide/carbon. Optional seal materials available
- Viton square ring seals
- Impeller - non-clogging cast iron vortex design passes 3/4" spherical solids
- 25 foot listed 3 wire neoprene cord and plug.
- No screens to clog
- Stainless steel screws, bolts and handle
- 1-1/2" NPT discharge with 2" or 3" flange available
- Corrosion resistant powder coated epoxy finish
- Moisture sensors available for early warning of seal failure. (Optional)
- 100% computerized tested

CAUTION

All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electric Code (NEC) and the Occupational Safety and Health Act (OSHA).