



48 INCH DIAMETER
MINIMUM FOR SIZE ONLY.
VOLUME MAY REQUIRE
LARGER BASINS.

SIMPLEX INSTALLATION

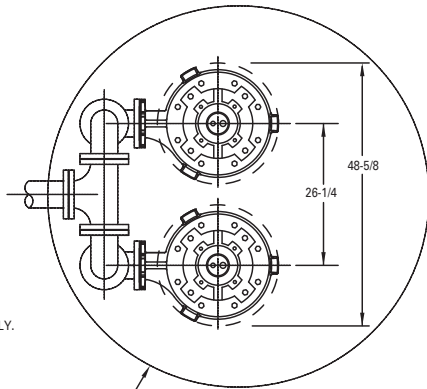

72 INCH DIAMETER
MINIMUM FOR SIZE ONLY.
VOLUME MAY REQUIRE
LARGER BASINS.

DUPLEX INSTALLATION
DIMENSIONS BASED ON STD. ANSI FITTING SIZES
CHECK VALVES REQUIRED, NOT SHOWN FOR CLARITY

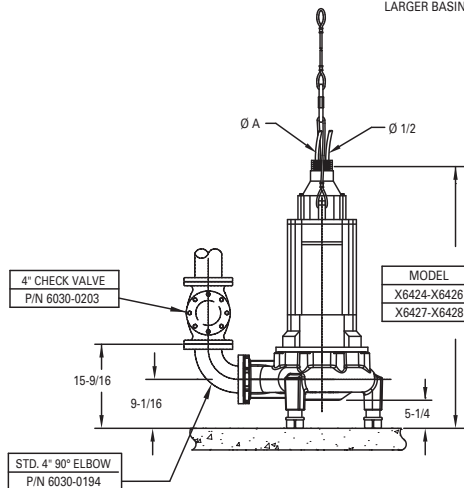

MODEL	OVERALL HEIGHT
X6424-X6426	48-11/32
X6427-X6428	55-19/32

MODEL	X6424	X6425	X6426	X6427	X6428
HP	25	30	40	50	60
DIM. "A"	"A"	"A"	"A"	"A"	"A"
230V	1.35±100	1.55±100	1.55±100	-	-
460V	.985±100	.985±100	1.125±100	1.35±100	1.55±100
575V	.985±100	.985±100	.985±100	1.125±100	1.35±100