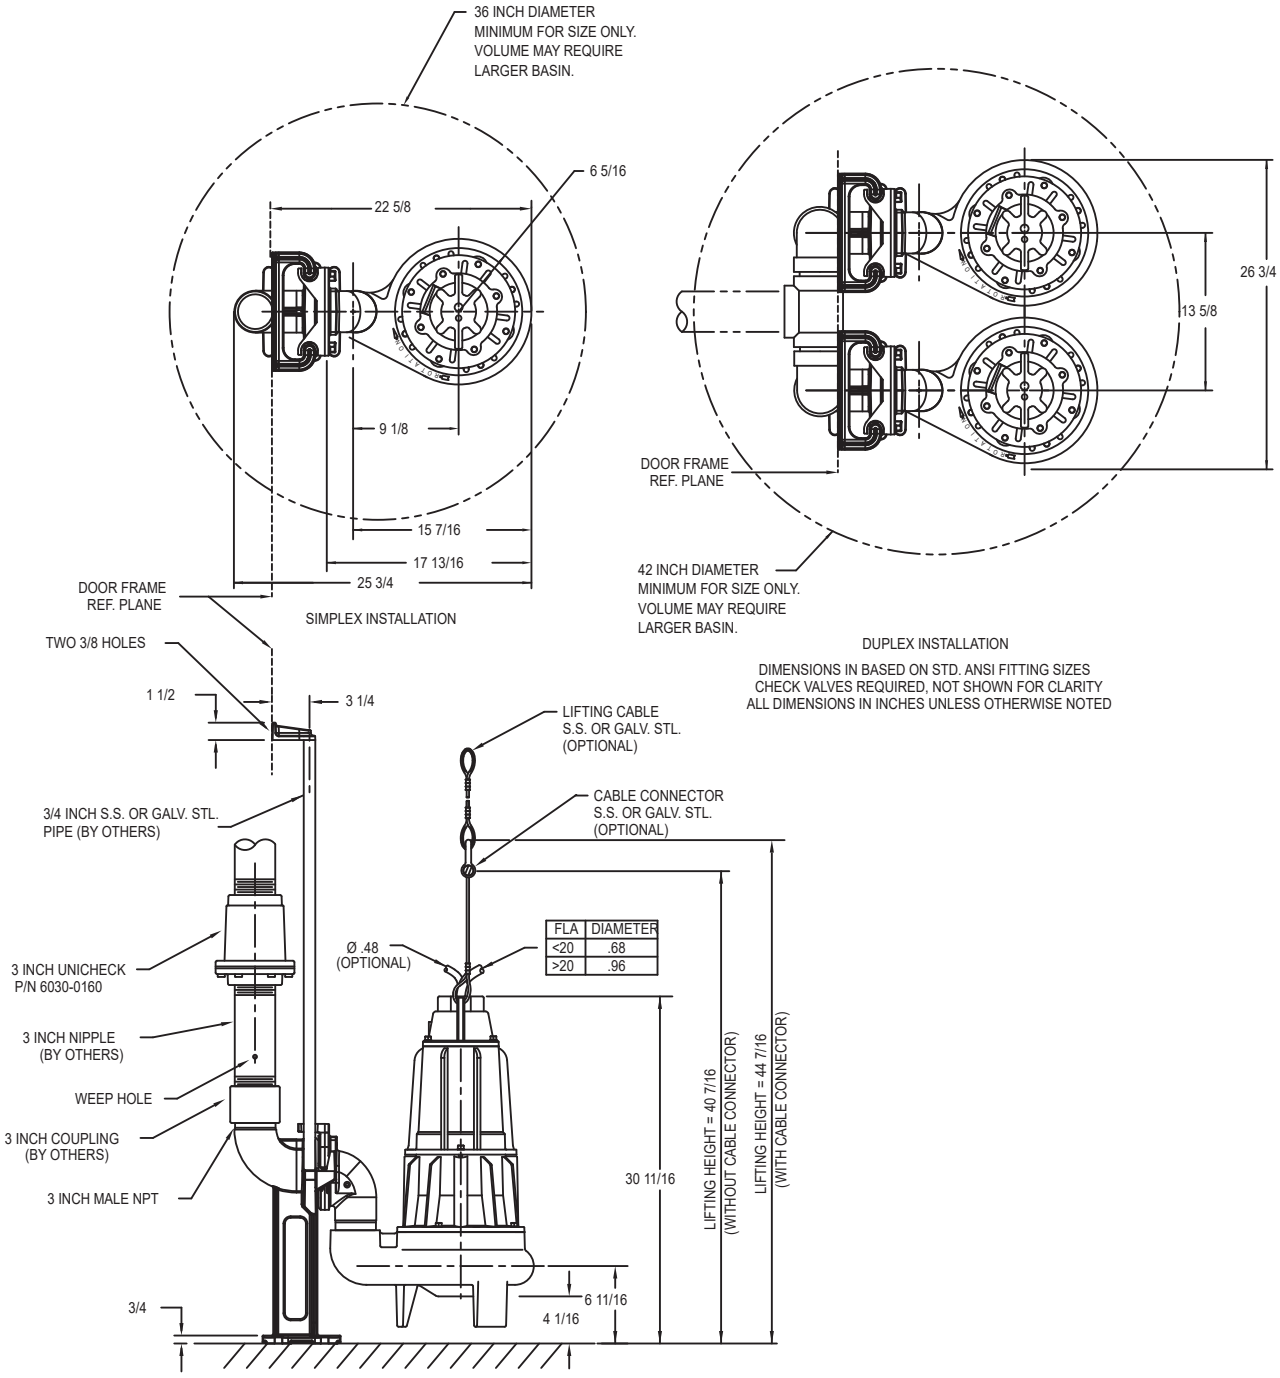
36 INCH DIAMETER
MINIMUM FOR SIZE ONLY.
VOLUME MAY REQUIRE
LARGER BASIN.
6 5/16
22 5/8
9 1/8
15 7/16
17 13/16
25 3/4
DOOR FRAME
REF. PLANE
SIMPLEX INSTALLATION
26 3/4
13 5/8
DOOR FRAME
REF. PLANE
42 INCH DIAMETER
MINIMUM FOR SIZE ONLY.
VOLUME MAY REQUIRE
LARGER BASIN.
DUPLEX INSTALLATION
DIMENSIONS IN BASED ON STD. ANSI FITTING SIZES
CHECK VALVES REQUIRED, NOT SHOWN FOR CLARITY
ALL DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED
TWO 3/8 HOLES
1 1/2
3 1/4
3/4 INCH S.S. OR GALV. STL.
PIPE (BY OTHERS)
LIFTING CABLE
S.S. OR GALV. STL.
(OPTIONAL)
CABLE CONNECTOR
S.S. OR GALV. STL.
(OPTIONAL)
Ø .48
(OPTIONAL)
FLA DIAMETER
<20 .68
>20 .96
3 INCH UNICHECK
P/N 6030-0160
3 INCH NIPPLE
(BY OTHERS)
WEEP HOLE
3 INCH COUPLING
(BY OTHERS)
3 INCH MALE NPT
3/4
30 11/16
LIFTING HEIGHT = 40 7/16
(WITHOUT CABLE CONNECTOR)
LIFTING HEIGHT = 44 7/16
(WITH CABLE CONNECTOR)
6 11/16
4 1/16