

Trusted. Tested. Tough.®



SECTION: Z5.10.100
ZM3382
0525
Supersedes
0225

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
Tel: (502) 778-2731 • 1 (800) 928-PUMP

Visit our website:
zoellerengineered.com

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

X6160 HAZARDOUS LOCATION SERIES TECHNICAL DATA

Class I, Division 1, Groups C & D Rated and Class I, Zone 1, Groups IIA & IIB Gas Areas

or

Class II, Division 1, Groups E, F & G and Zone 20 Dust Areas
Commercial Duty Effluent



	☐ X6161	☐ X6163
PUMP NAME PLATE HORSEPOWER:	1/2 HP	1/2 HP
SOLID SIZE: in (mm)	3/4" (19mm)	3/4" (19mm)
MINIMUM HEAD: ft. (m)	5.0' (1.5m)	5.0' (1.5m)
MAXIMUM HEAD: ft. (m)	56' (17.1m)	66' (20.1m)
MAX.FLOW GPM (L/min) @ MIN. HEAD ft. (m)	100 GPM @ 5' (379 L/min @ 1.5m)	61 GPM @ 5' (231 L/min @ 1.5m)
DISCHARGE SIZE: VERTICAL FEMALE	☐ 1-1/2" NPT; Optional Flange, order: ☐ 2" NPT (10-1305) or ☐ 3" NPT (10-1306)	

PUMP NET WEIGHT: lbs (kg)	125-133 (57-60 kg)	MOTOR TYPE CSA APPROVED:	SUBMERSIBLE Class 1 Gas Area Certified Class 2 Dust Area Certified
SERVICE FACTOR:	1.0	TYPE SOW POWER CORD LENGTH: ft (m)	25' (7.62m) ☐ Optional 50'
MOTOR DESIGN LETTER:	NEMA B	MOTOR SHAFT:	416 S.S.
IMPELLER TYPE:	CAST IRON VORTEX	STATOR INSULATION:	CLASS B
SQUARE RINGS:	VITON	STATOR AND LEAD WIRES INSULATION:	CLASS B
RPM:	3450	MAXIMUM STATOR TEMPERATURE:	CLASS B 266 °F (130 °C)
SURFACE TEMPERATURE CODE:	T5 (1PH) T6 (3PH)		

SHAFT SEAL CONSTRUCTION:	STANDARD	CARBON/CERAMIC - UPPER CARBON/SILICON CARBIDE - LOWER
	OPTIONAL UPPER	☐ SILICON CARBIDE/SILICON CARBIDE
	OPTIONAL LOWER	☐ SILICON CARBIDE/SILICON CARBIDE
STANDARD SENSING DEVICES*	MOTOR THERMAL SHUTOFF	INTEGRAL OVERLOAD WITH AUTOMATIC RESET - 1 PHASE
	MOISTURE DETECTION	MOISTURE SENSING PROBES WITH LEAD WIRES
MINIMUM FLUID LEVEL FOR CONTINUOUS OPERATIONS: in (m)		24" (0.6 m)
MAXIMUM WATER TEMPERATURE:		104 °F (40 °C)


*Requires a circuit in control panel to function.

ELECTRICAL DATA

MODEL	HP	☐ 115V/1Ph		☐ 575V/3Ph	
		FLA	LRA	FLA	LRA
☐ X6161	1/2	15.5	31.2	2.4	11.3
☐ X6163	1/2	15.0	31.2	2.4	11.3

Refer to reverse side for Head/Capacity Performance Curves

© Copyright 2025 Zoeller® Co. All rights reserved.

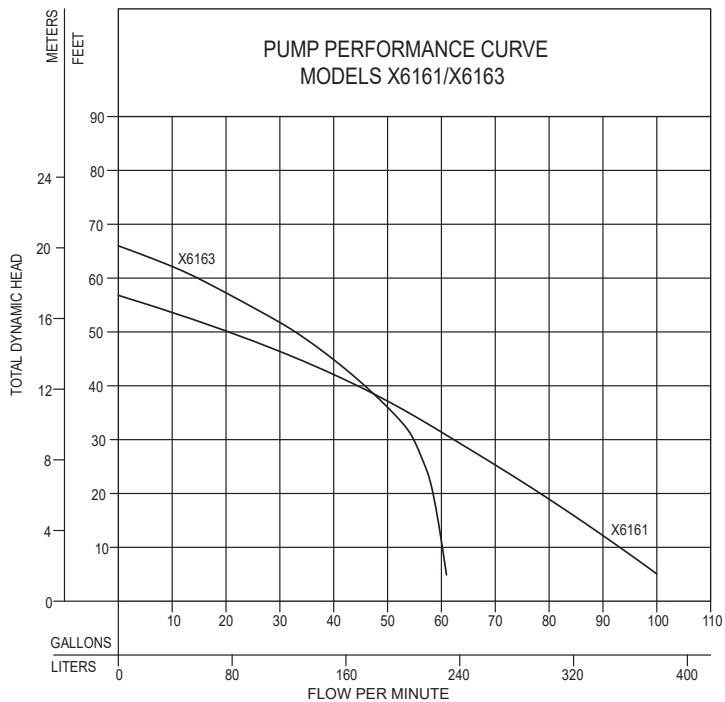

TOTAL DYNAMIC HEAD/FLOW PER MINUTE EFFLUENT AND DEWATERING


MODELS		X6161		X6163	
Feet	Meters	Gal.	Liters	Gal.	Liters
5	1.5	100	379	61	231
10	3.0	93	352	60	227
15	4.6	86	326	60	227
20	6.1	79	299	59	223
25	7.6	71	267	57	216
30	9.1	62	235	55	208
40	12.2	45	170	46	174
50	15.2	20	76	33	125
60	18.3	--	--	15	57
70	21.3	--	--	--	--
80	24.4	--	--	--	--
Shut-off Head:		56 ft. (17.1m)		66 ft. (20.1m)	

4-9/16 R.

009920

Standard all models - 25 ft. cord - 1/2 H.P.					
X6161 MODELS	Control Selection			Listings	
	Volts	Ph	Amps	cCSAus	
MX6161	115	1	15.5	Yes	
NX6161	115	1	15.5	Yes	
BA6161	575	3	2.4	Yes	

Standard all models - 25 ft. cord - 1/2 H.P.					
X6163 MODELS	Control Selection			Listings	
	Volts	Ph	Amps	cCSAus	
MX6163	115	1	15.0	Yes	
NX6163	115	1	15.0	Yes	
BA6163	575	3	2.4	Yes	

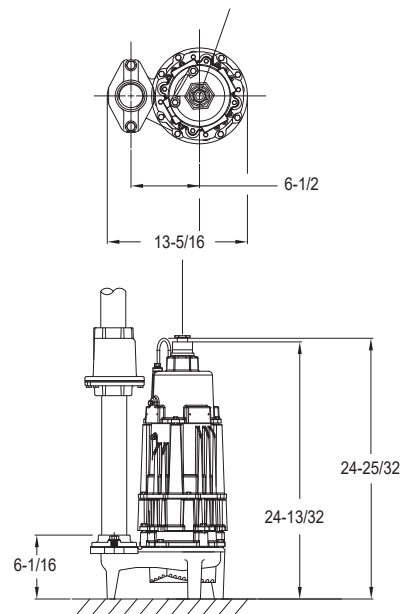

SK1992

FEATURES

- Durable epoxy coated cast iron construction
- Motor - 1/2 HP or 1 HP, 60 Hz, 3450 RPM, 1 PH, oil filled, hermetically sealed.
- Thermal sensor with lead wire (3PH), integral overload with automatic reset (1 PH)
- Bearings - upper and lower ball bearings
- Stainless steel motor shaft
- Dual mechanical shaft seals - upper carbon/ceramic, lower silicon carbide/carbon. Optional seal materials available
- Viton square ring seals
- Impeller - non-clogging cast iron vortex design passes 3/4" spherical solids
- 25 foot listed 3 wire neoprene cord with a 50' cord option.
- No screens to clog
- Stainless steel screws, bolts and handle
- 1-1/2" NPT discharge with 2" or 3" flange available
- Corrosion resistant powder coated epoxy finish
- Moisture sensors for early warning of seal failure.
- 100% computerized tested

CAUTION

All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).